PCIe® 3.0 / Post-3.0 Protocol

Mahesh Wagh
Intel Corporation

Copyright © 2011, PCI-SIG, All Rights Reserved

PCIe 3.0 / Post-3.0 Protocol Update

- ECNs Incorporated into the PCIe 3.0 Base Spec
  - ✓ Optimized Buffer Flush & Fill (OBFF)
  - ✓ ASPM Optionality
  - ✓ End-End TLP Prefix Changes for RCs
  - ✓ Protocol Multiplexing (PMUX)
- ECNs Currently Under Development
  - ✓ Process Address Space ID (PASID)
  - ✓ Lightweight Notification (LN) Protocol
- PCI Code and ID Assignments [see back-up]
  - ✓ Class Code & Capability ID Extraction ECN
  - ✓ PCI Code and ID Assignment Specification
  - ✓ PCI Code & ID Assignment Specification Update ECN

Copyright © 2011, PCI-SIG, All Rights Reserved

Optimized Buffer Flush & Fill (OBFF)

 Copyright © 2011, PCI-SIG, All Rights Reserved

Reducing Platform Power With Optimized Buffer Flush/Fill

- Problem statement: devices do not know power state of central resources
  - ✓ "Asynchronous" device activity prevents optimal power management of memory, CPU, RC internals by idle window fragmentation
  - ✓ Premise: If devices knew when to talk, most could easily optimize their Request patterns
    - Result: System would stay in lower power states for longer periods of time with no impact on overall performance
- Optimized Buffer Flush/Fill (OBFF) – a mechanism for broadcasting PM hint to device

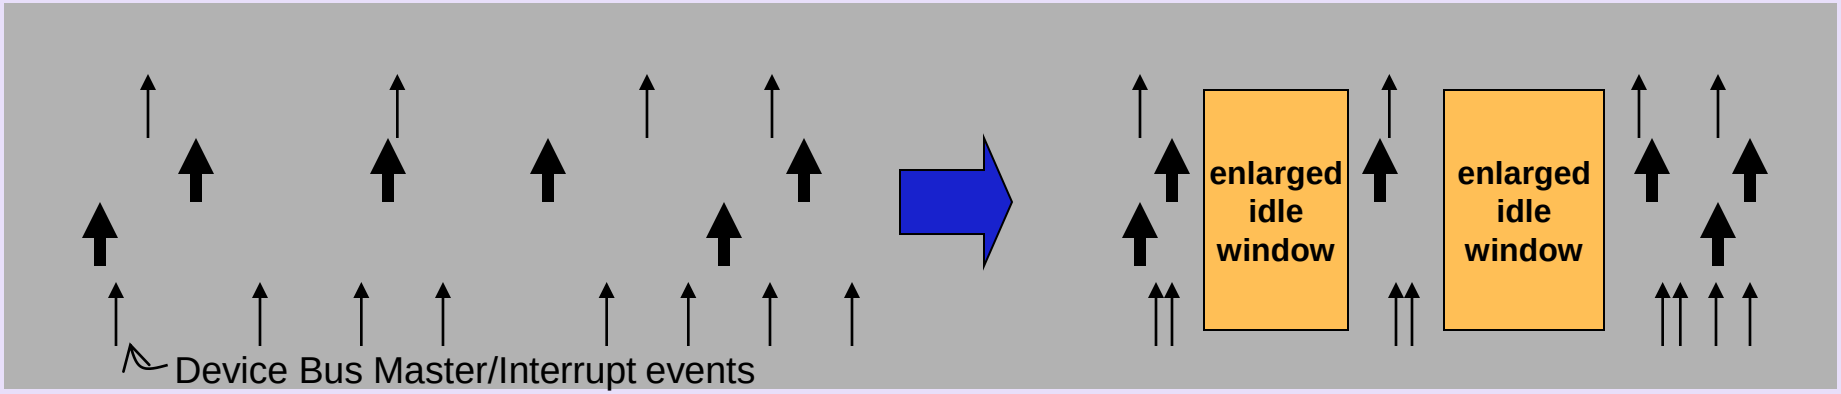

Copyright © 2011, PCI-SIG, All Rights Reserved

How to do OBFF?

Optimal Windows

- **CPU Active – Platform fully active. Optimal for bus mastering and interrupts**
- **OBFF – Platform memory path available for memory read and writes**
- **Idle – Platform is in low power state**

WAKE# Waveforms

Transition Event	WAKE#
Idle → OBFF	
Idle → CPU Active	
OBFF/CPU Active → Idle	
OBFF → CPU Active	
CPU Active → OBFF	

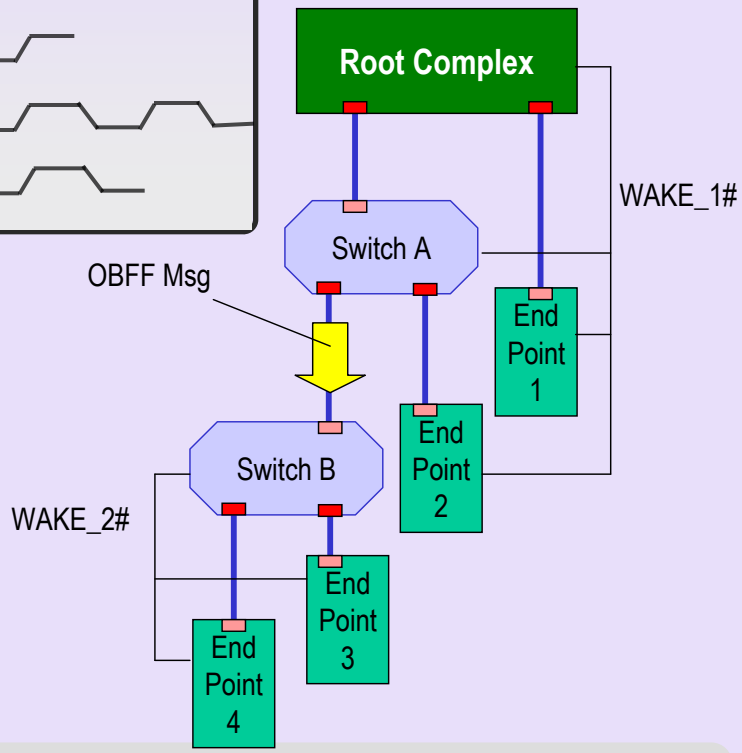

- Requirements:
  - ✓ Notify all Endpoints of optimal windows with minimal power impact
  - ✓ Keep it Simple – Maximize cost/benefit
- Solution 1: When possible, use WAKE# with expanded meanings
- Solution 2: WAKE# not available – Use PCIe Message

Greatest Potential Improvement When Implemented by All Platform Devices

Copyright © 2011, PCI-SIG, All Rights Reserved

ASPM Optionality

 Copyright © 2011, PCI-SIG, All Rights Reserved

ASPM Optionality

- Permits full matrix of L0s and L1 support for ASPM
  - ✓ Prior to this ECN, all PCIe External Links were required to support ASPM L0s

Table 5-3: Encoding of the ASPM Support Field

Field	Description
ASPM Support	00b – ~~Reserved~~No ASPM support 01b – L0s supported 10b – ~~Reserved~~L1 supported 11b – L0s and L1 supported

- Clarifies that software must not enable L0s in either direction on a given link unless components on both sides of the Link each support L0s
- Defines a new Capability bit ASPM Optionality Compliance, which software can use to help determine whether to:
  - ✓ Enable ASPM and/or
  - ✓ Run ASPM compliance tests

Copyright © 2011, PCI-SIG, All Rights Reserved

End-End TLP Prefix Changes for RCs

 Copyright © 2011, PCI-SIG, All Rights Reserved

End-End TLP Prefix Changes for RCs

- TLP Prefix was an ECN against the 2.0 Base Spec
  - ✓ Prefixes are one or more DWORDs prepended to a standard TLP Header, in order to carry additional TLP information
  - ✓ Local TLP Prefixes exist on a single Link
  - ✓ End-End TLP Prefixes are carried end-to-end from source to destination
- The End-End TLP Prefix Changes for RCs ECN:
  - ✓ Permits different RPs supporting EE TLP Prefixes to report different values for the Max End-End TLP Prefixes field
    - Important for multi-component RC implementations, but requires a change in the software programming model
  - ✓ Changes & clarifies error handling requirements for an RP that receives a TLP with more EE TLP Prefixes that it supports
    - Permits & encourages handling this case as a Non-Fatal Error instead of a Fatal Error

Copyright © 2011, PCI-SIG, All Rights Reserved

Protocol Multiplexing (PMUX)

 Copyright © 2011, PCI-SIG, All Rights Reserved

PMUX Overview

- Added to the *PCI Express 3.0 Base Specification*
  - ✓ "ECN" was against the 0.9 draft of the 3.0 Base Spec
- Supports multiple protocols concurrently on a PCIe Link
  - ✓ Independent protocol streams, independent buffering and flow control resources, independent sequence numbers, etc.
  - ✓ Up to 4 concurrently active PMUX Channels on each Link
- No inherent flow control or packet retransmission
  - ✓ If needed, provided by the protocol within each PMUX Channel
- Link local
  - ✓ Routing is not part of PMUX, but has been considered for possible future work
- Minimal impact to existing PCIe framing protocol
  - ✓ No efficiency impact to PCIe protocol packets

Copyright © 2011, PCI-SIG, All Rights Reserved

Example PMUX Usage: Coherent Accelerator

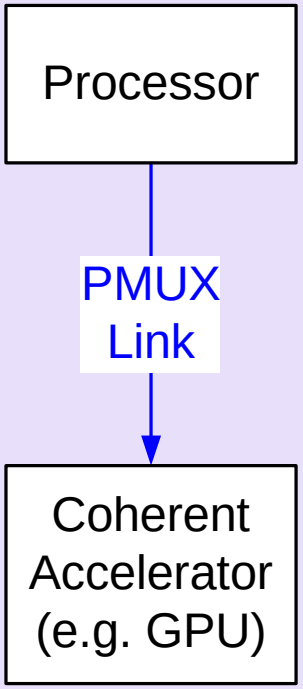

- PMUX link enables a coherent accelerator to participate in the processor's coherency protocol
  - ✓ In addition to PCIe traffic
  - ✓ Same accelerator might use PCIe exclusively on other processor platforms

Copyright © 2011, PCI-SIG, All Rights Reserved

Example PMUX Usage: Ethernet Switching

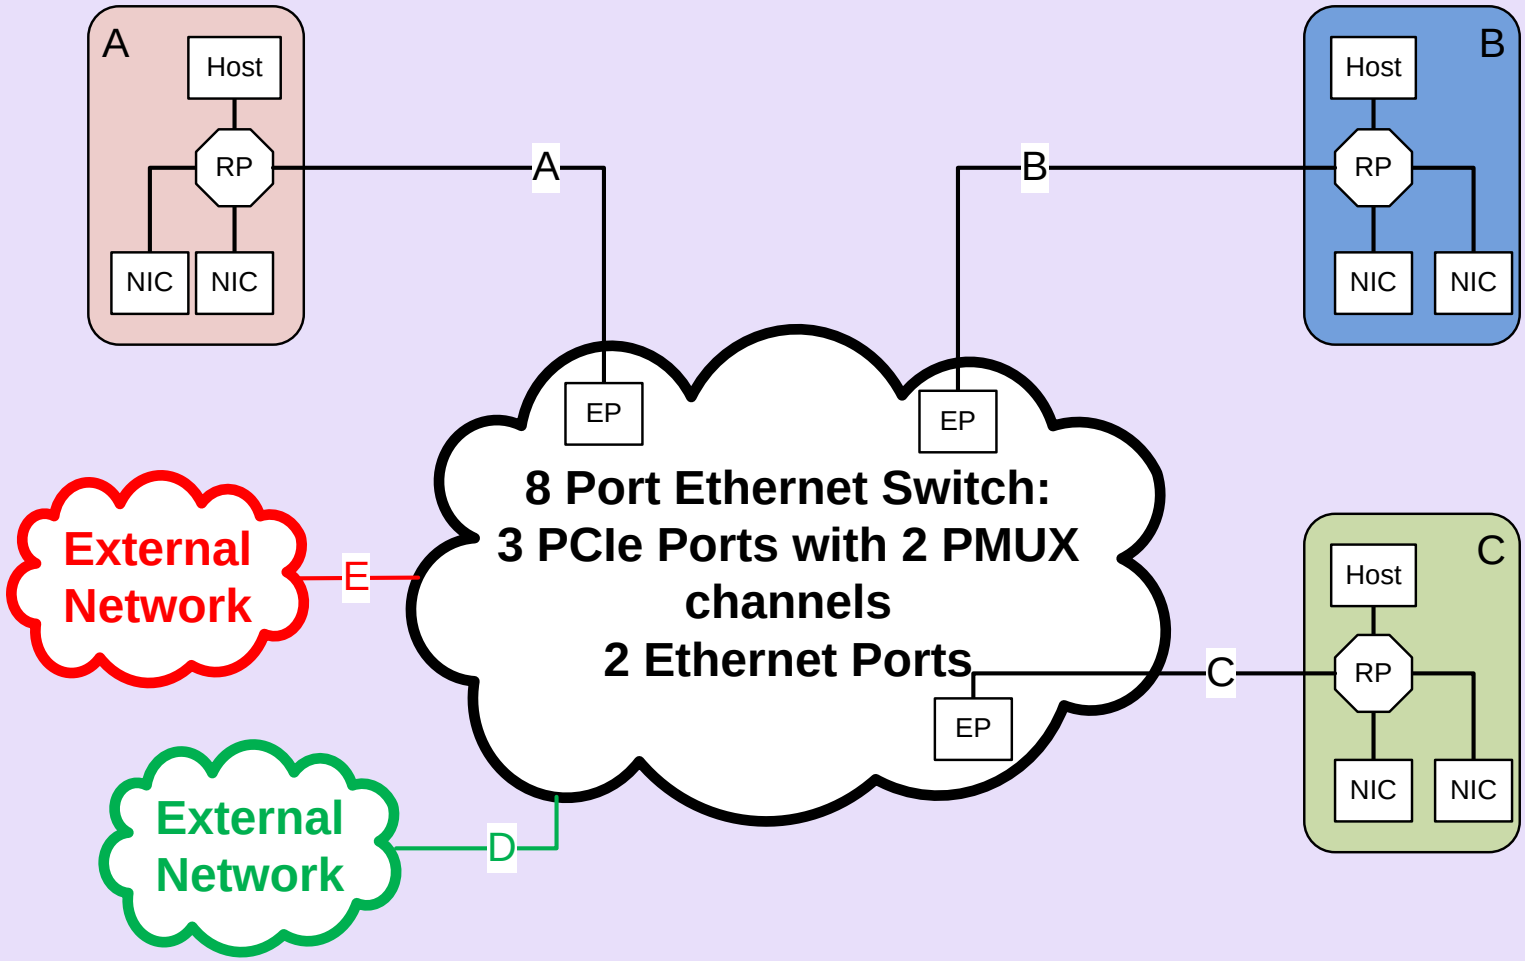

Copyright © 2011, PCI-SIG, All Rights Reserved

PMUX Mux/Demux Operation

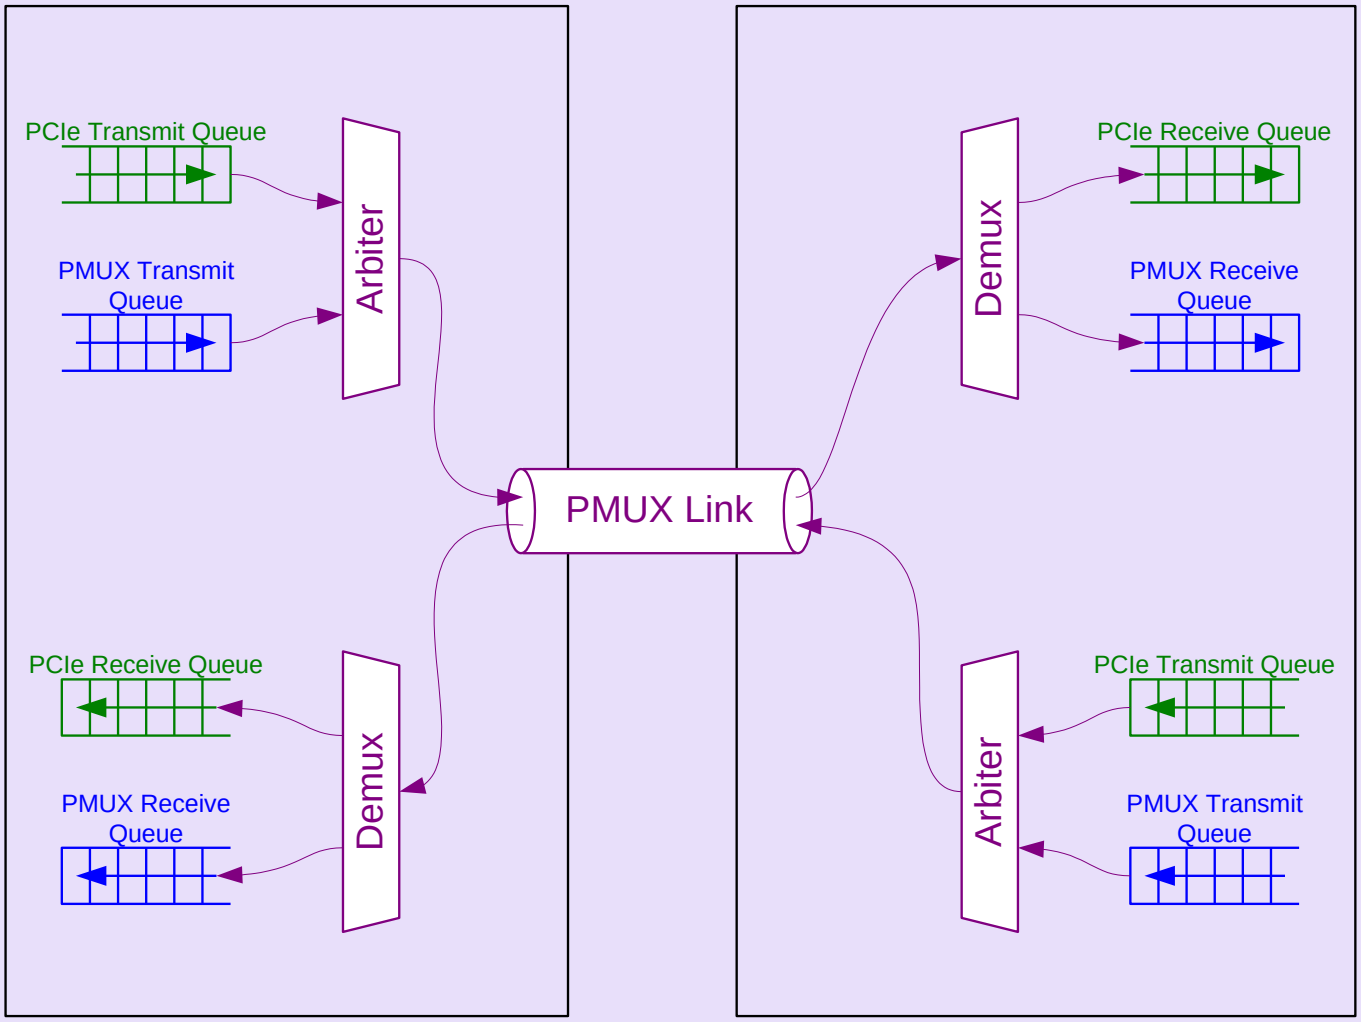

Copyright © 2011, PCI-SIG, All Rights Reserved

Key PMUX Attributes

- Extremely low per-packet overhead compared to PCIe Message encapsulation approaches
  - ✓ 6.5 bytes: PMUX Overhead
  - ✓ 24 bytes: PCIe MsgD Overhead
- Does not impact and is not affected by PCIe flow control & buffering requirements
  - ✓ PCIe flow control gets in the way for some protocols
  - ✓ Deadlock issues with non-tree topologies
  - ✓ PCIe flow control requires at least MPS-sized buffers in each VC
- Does not impact and is not affected by PCIe Ack / Nak
  - ✓ Retransmission not required for some protocols
- Enables low latency routing compared to Message encapsulation
  - ✓ PMUX packets are identified early
  - ✓ Routing decision can be made 17.5 bytes earlier

Copyright © 2011, PCI-SIG, All Rights Reserved

Process Address Space ID (PASID)

Copyright © 2011, PCI-SIG, All Rights Reserved

IOV Background

- Address Translation Services (ATS) supports:
  - ✓ Performance optimization for direct assignment of a Function to a Guest OS running on a Virtual Intermediary (Hypervisor)
- Page Request Interface (PRI) supports:
  - ✓ Functions that can raise a Page Fault
- Single Root-I/O Virtualization (SR-IOV) supports:
  - ✓ Light-weight Functions (Virtual Functions)
  - ✓ Large numbers of Functions (multiple Bus Numbers)

Copyright © 2011, PCI-SIG, All Rights Reserved

PASID Overview

- Supports Direct Assignment of I/O to a User Process running on a Guest OS running on a Virtual Intermediary
  - ✓ Untranslated Memory Requests
  - ✓ Translation Requests
  - ✓ Translation Invalidations
  - ✓ Page Requests
- Supports Execute Permission
- Supports Privileged Mode

Copyright © 2011, PCI-SIG, All Rights Reserved

PASID Address Mapping

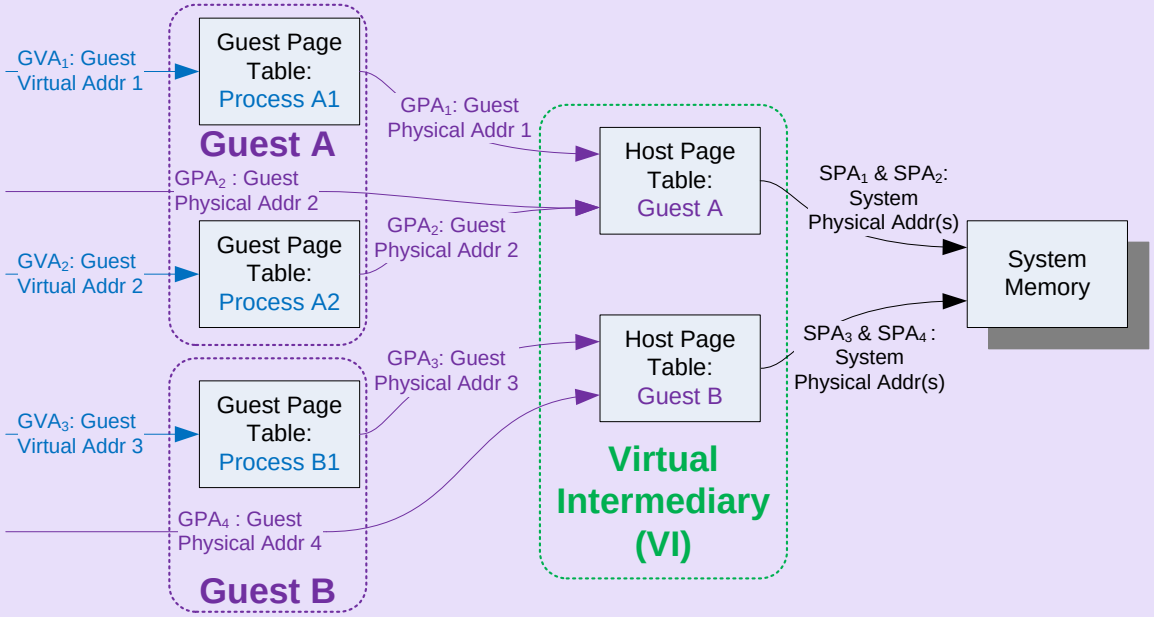

Address Translation Cache (either in TA *or* in Function's ATC)

$GVA_1/A1 \rightarrow\rightarrow SPA_1$	
$GVA_2/A2 \rightarrow\rightarrow SPA_2$	
$GPA_2 \rightarrow SPA_2$	
$GVA_3/B1 \rightarrow\rightarrow SPA_3$	
$GPA_4 \rightarrow SPA_4$	

Cache Entry Type	*Meaning*
GVA/PASID →→ SPA	*TA / ATC Entry with PASID*
GPA → SPA	*TA / ATC Entry without PASID*

- 3 User Processes
- 2 Guests
- Cache Example:
  - ✓ 3 GVA Entries
    - GVA_1 / A1 →→ SPA_1
    - GVA_2 / A2 →→ SPA_2
    - GVA_3 / B1 →→ SPA_3
    - Intermediate GPA not cached
  - ✓ 2 GPA Entries
    - GPA_2 → SPA_2
    - GPA_4 → SPA_4
- Directly Assigned to User Process
  - ✓ GVA_1 / GVA_2 / GVA_3
- Directly Assigned to Guest
  - ✓ GPA_2 / GPA_4
- … → SPA_2 cached twice
  - ✓ GVA_2 / A2 →→ SPA_2
  - ✓ GPA_2 → SPA_2

Copyright © 2011, PCI-SIG, All Rights Reserved

PASID is TWO ECNs

- Process Address Space ID ECN
  (PCI Express Base 3.0)
  - ✓ PASID TLP Prefix
  - ✓ Usage on Untranslated Memory Requests
  - ✓ PASID Capability
- PASID Translation ECN
  (Address Translation Services 1.1)
  - ✓ Usage on ATS Requests
  - ✓ Usage on ATS Invalidation Requests
  - ✓ Usage on PRI Requests
  - ✓ Usage on PRG Responses
  - ✓ ATS Invalidation rules

Copyright © 2011, PCI-SIG, All Rights Reserved

PASID TLP Prefix

- Permitted on:
  - ✓ Untranslated Memory Request
    - Including Untranslated AtomicOP Requests
  - ✓ ATS Translation Request
  - ✓ ATS Invalidation Request
  - ✓ Page Request Interface Request (PRI)
  - ✓ Page Request Group Response (PRG)

Base ECN

ATS ECN

- PASID does not require ATS support
  - ✓ Functions can use only Untranslated Memory Requests
  - ✓ Without ATS support, pages must be pinned
- PASID does not require PRI support
  - ✓ PRI permits paging and late pinning
    - User Process/Guest OS level
      or
    - Guest OS/Hypervisor level
  - ✓ Without PRI support, pages must be pinned

Complete presentation on PASID given by IOV Workgroup

Copyright © 2011, PCI-SIG, All Rights Reserved

Lightweight Notification (LN) Protocol

 Copyright © 2011, PCI-SIG, All Rights Reserved

LN Protocol: Overview

- An optional-normative simple protocol:
  - ✓ A device can *register* one or more cachelines in host memory, and later be notified by a hardware mechanism when any registered cachelines are updated
  - ✓ Architected support for 64-byte & 128-byte cachelines
  - ✓ New LN Requester Capability structure for software to discover and manage LN Requester capabilities in Endpoints
  - ✓ New field in Device Capabilities 2 register to inform software of LN Completer capabilities in the host
- Transactions
  - ✓ LN Reads/Completions/Writes – special forms of Memory Reads/Completions/Writes with registration semantics
  - ✓ LN Messages – SIG-defined Vendor-Specific Messages to convey notifications regarding existing registrations
  - ✓ No changes required for PCIe Switches

Copyright © 2011, PCI-SIG, All Rights Reserved

LN Protocol: Example Benefits

- Reduction of I/O bandwidth consumption & I/O latency:
  - ✓ Device caching can significantly reduce I/O bandwidth consumption and I/O latency for some applications
  - ✓ Reducing I/O bandwidth consumption also reduces host memory subsystem bandwidth consumption
- Lightweight signaling:
  - ✓ LN Protocol enables host user-space software to signal a device by updating a cacheline as opposed to performing a PIO operation, which has higher software overhead and synchronization/flow-control issues
- Dynamic device associations:
  - ✓ VM guest drivers communicating with a device via host memory structures enables easier VM guest migration and switching between virtualized and direct I/O for that device

Copyright © 2011, PCI-SIG, All Rights Reserved

LN Protocol: Basic Operation

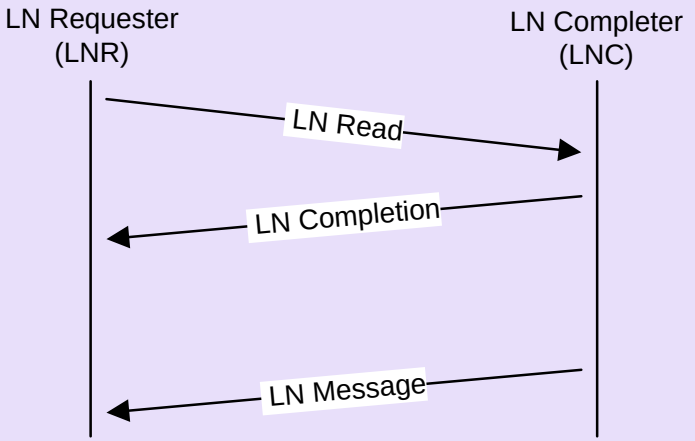

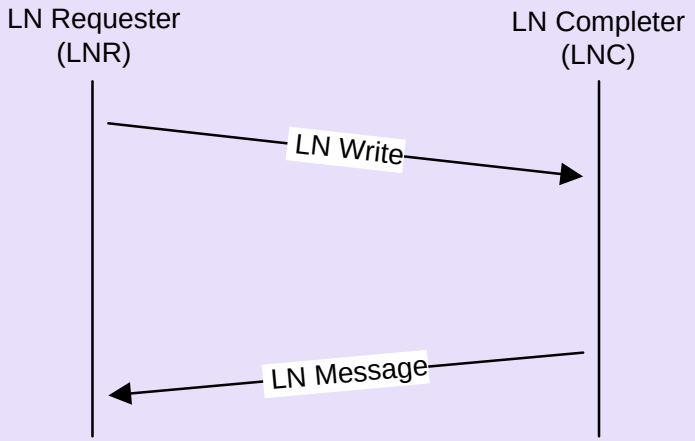

- LNR reads & registers a cacheline using LN Read
- LNC acknowledges registration & returns data with LN Completion
- Later, LNC notifies LNR with LN Message when cacheline is updated

- LNR writes & registers a cacheline using LN Write
- Later, LNC notifies LNR with LN Message when cacheline is updated

Copyright © 2011, PCI-SIG, All Rights Reserved

LN Protocol: Additional Attributes

- Evictions: LN Completer can evict registrations when it runs short on resources
- LN Message Notification Reasons:
  - ✓ Registered cacheline was updated
  - ✓ Registered cacheline was evicted
  - ✓ All registered cachelines for this LNR were evicted
- Zero-length LN Reads for probing without registering
  - ✓ LN-capable host not required to support LN for all memory regions
  - ✓ LN-capable hosts are required to support LN with 4KB granularity
- Zero-length LN Writes for explicit deregistration
  - ✓ Enables LN Requester to manage its outstanding registrations
- LN Requester Capability Structure provides:
  - ✓ Advertisement of maximum outstanding registrations
  - ✓ Software specified limit for maximum outstanding registrations

Copyright © 2011, PCI-SIG, All Rights Reserved

PMUX Extended Capability

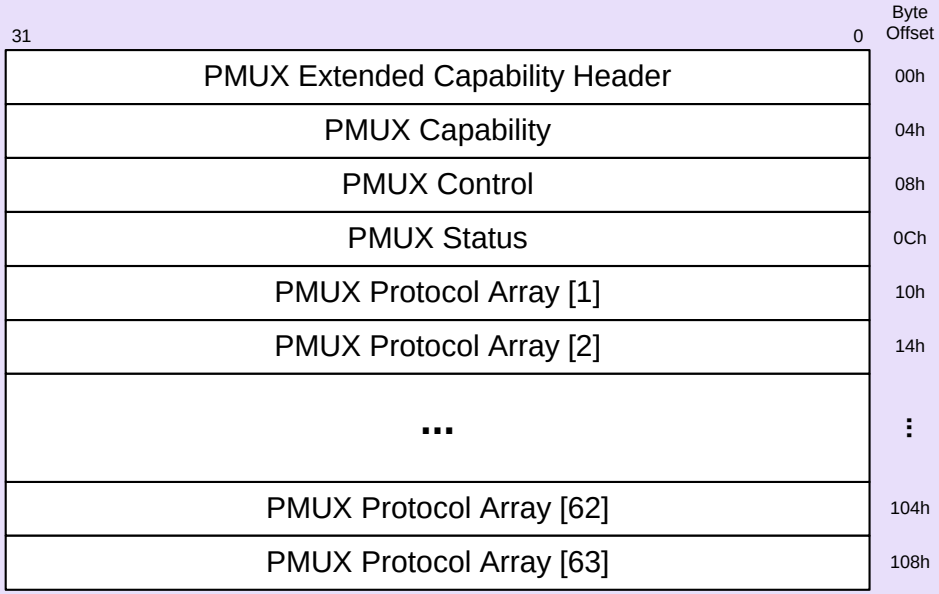

- Variable-length capability
  - ✓ Based on PMUX Protocol Array Size
  - ✓ Each supported PMUX Protocol identified by Authority ID / Protocol ID
- Any given PMUX Port supports up to 63 PMUX Protocols
  - ✓ Up to 4 enabled at a time
  - ✓ Any PMUX Channel can carry any supported Protocol
  - ✓ Protocols selected by PMUX Protocol Array index

- PMUX supported if capability is present
- PMUX default is disabled
  - ✓ Software enables

Copyright © 2011, PCI-SIG, All Rights Reserved

Class Code & Capability ID Extraction ECN

Copyright © 2011, PCI-SIG, All Rights Reserved

Class Code & Capability ID Extraction ECN

- An ECN against the *PCI Local Bus Specification*, Rev 3.0
- Extracts the Class Code definitions from Appendix D
- Extracts the Capability ID definitions from Appendix H
- Enables the consolidation of these definitions into a new standalone document that's easier to maintain
- The new document is the *PCI Code and ID Assignment Specification*
- Consolidating these and other definitions makes them easier to find and manage, and reduces the chance of lost or duplicate assignments
- New IDs for specifications/ECNs, or new Class Codes will trigger updates to the new specification

Copyright © 2011, PCI-SIG, All Rights Reserved

PCI Code and ID Assignment Specification

Copyright © 2011, PCI-SIG, All Rights Reserved

PCI Code and ID Assignment Specification

- Consolidates:
  - ✓ Class Code definitions from the *PCI Local Bus Specification* Appendix D
  - ✓ Capability ID definitions from the *PCI Local Bus Specification* Appendix H
  - ✓ Extended Capability ID definitions from the *PCI Express Base* & I/O Virtualization specifications
- Includes:
  - ✓ New Class Code and Capability ID assignments made since the *PCI Local Bus Specification*, Revision 3.0
  - ✓ Some cleanup of formatting & terminology

Copyright © 2011, PCI-SIG, All Rights Reserved

PCI Code & ID Assignment Specification Update ECN

Copyright © 2011, PCI-SIG, All Rights Reserved

PCI Code & ID Assignment Specification Update ECN

- A very simple ECN against the new *PCI Code & ID Assignment Specification*
  - ✓ Intentionally chose to separate these “new changes” from the initial version so they could receive proper visibility & review
  - ✓ Wanted the initial version not to include any semantic changes
- Adds a new Programming Interface assignment to Base Class 01h (Storage Controllers) / Sub-Class 08h (Flash Controllers)
  - ✓ 02h – Solid State Storage Controller – Enterprise NVMHCI
- Changes “Flash Controller” references in existing Class Code definitions to “Solid State Storage Controller”
- Adds new “Null Capability” ID for both standard Capabilities and Extended Capabilities
  - ✓ Intended for use by hypervisors that intentionally choose not to expose selected Capabilities in the virtualized Configuration Space for VMs
- Assigns Extended Capability ID 001Ah for Protocol Multiplexing (PMUX)

Copyright © 2011, PCI-SIG, All Rights Reserved

Thank you for attending the
PCI-SIG Developers Conference
Asia-Pacific Tour 2011

For more information please go to
www.pcisig.com

 Copyright © 2011, PCI-SIG, All Rights Reserved